

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 20 TOWNSHIP 17 RANGE 4

DATE: 10-25-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 9-7-02


IN. S.P.C. E ZONE NAD '83

NAME: 17042005

N: 517059.7183(m)

E: 63092.8148(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

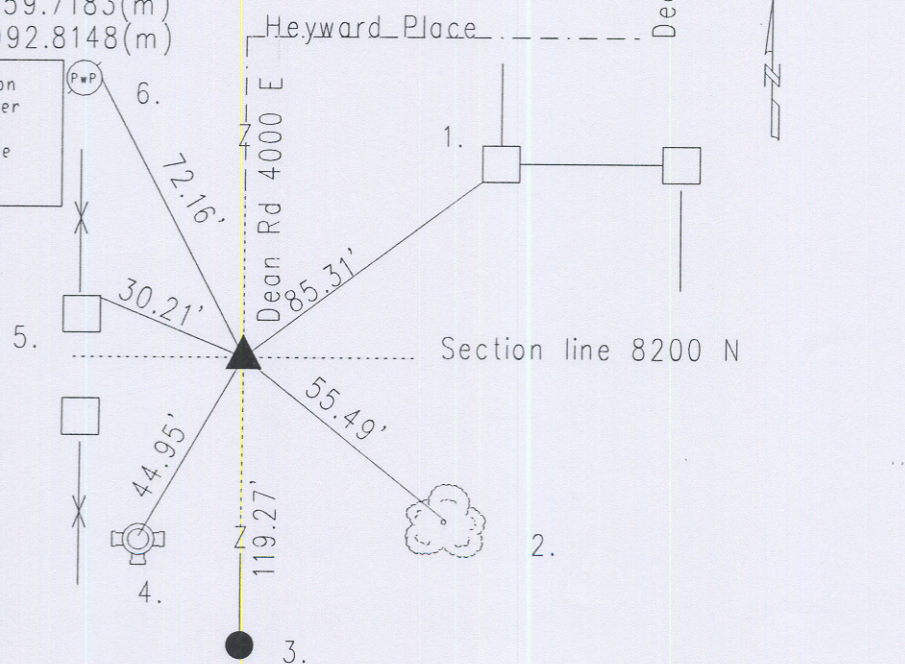

17042005 Center

CORNER HISTORY: Marion County Atlas pg. 12 dated 1820 did not reflect a stone set at the center of this section. Survey by Tom Murphy set an axle as the center of section 6-2-1980 from P.I. Cripe Surveying Job#78174-10004 boundary survey of area.

Reference dated 9-7-02 by Wilcoxon called mag nail w/washer over axle as per Cripe.

Reference dated 10-24-07 by Wilcoxon called found axle 3" down set Harrison where the axle had been, no other points were found.

REF.	DISTANCE	DESCRIPTION
1.	85.31'	SW corner of brick column at ground :Sycamore Springs 8101 N
2.	55.49'	Mag nail w/bw W 20" hackberry 3"up
3.	119.27'	Due S to 2" pipe over a stone
4.	44.95'	Top nut of fire hydrant
5.	30.21'	NF corner of 5th stone up of stone column 36"up
6.	72.16'	PK nail E PwP#255-212B 6"up